



Input Parameters

|                     |             |
|---------------------|-------------|
| Input Voltage Range | 220-240 Vac |
| Input Current       | <0.01A      |
| Frequency           | 50Hz        |
| Ambient Temperature | 0-40C       |
| Class               | II          |


Mechanical

|                          |                                          |
|--------------------------|------------------------------------------|
| Material                 | Polycarbonate                            |
| Wiring Type              | Terminal block (0.5-4.0mm <sup>2</sup> ) |
| Mounting                 | Din Mount                                |
| Product Dimension Length | 72mm                                     |
| Product Dimension Height | 73mm                                     |
| Product Dimension Width  | 92mm                                     |



Required Safety Warnings

- This product must only be installed by a licensed electrician.
- Before commencing installation turn off and isolate the electrical supply
- Risk of accidental contact with live parts. Do not energise with product open or disassembled.
- The only replaceable part is the battery
- Do not attempt to service other parts of the fitting as this will void the warranty.
- After installation allow the battery to charge for 24 hours before carrying out discharge testing.
- WARNING: ALL MAINTENANCE, SUCH AS BATTERY CHANGE ON THIS LUMINAIRE, TO BE PERFORMED BY QUALIFIED PERSONNEL ONLY. DE-ENERGISE ALL SUPPLIES BEFORE MAINTENANCE.
- As the installer, it is your responsibility to ensure you comply to all relevant building and safety codes. for example the BCA, AS3000
- The replacement of the battery is needed when they no longer meet their rated duration of operation after the corresponding recharge period.
- Dongguan Evolt Electronics Co., Ltd. No.3 Qinghu East Road Yuliangwei Village, Qingxi TownDongguan City, Guangdong, China 523649

Product Line Drawing

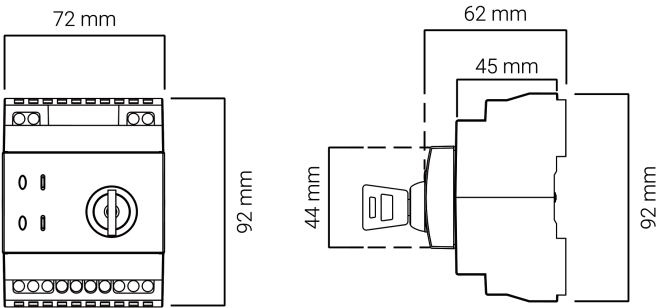

Product Install Picture

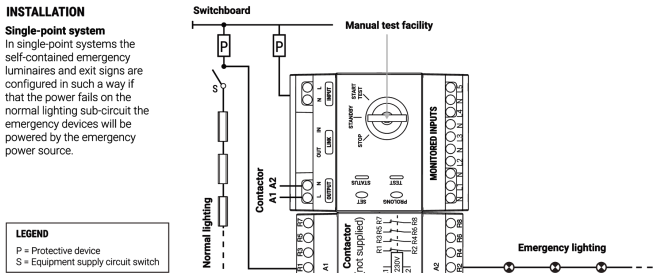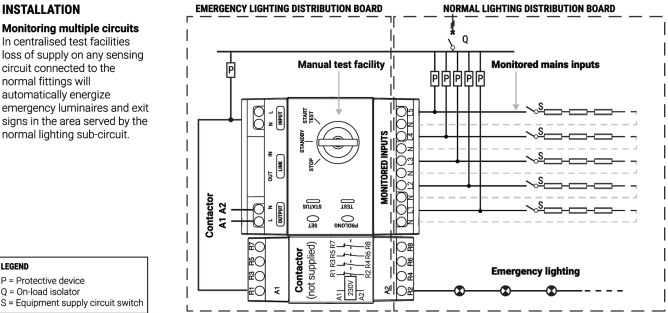

Wiring Diagram

