


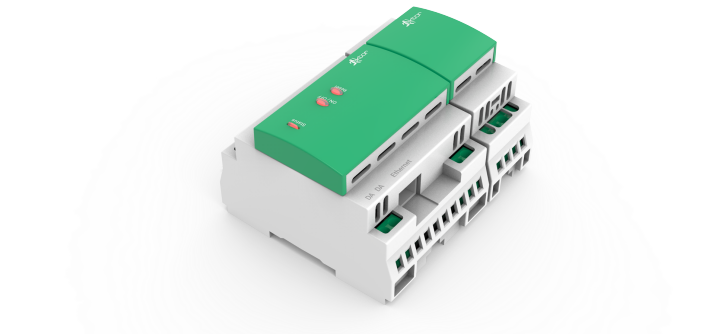


Input Parameters	
Input Current	<0.03A
Frequency	50Hz
Ambient Temperature	0-40C
Class	II


Mechanical	
Material	Polycarbonate
Mounting	Surface Mount
Ingress Protection	IP20
Product Dimension Length	108mm
Product Dimension Height	62mm
Product Dimension Width	92.5mm

- Required Safety Warnings
- This product must only be installed by a licensed electrician.
 - Before commencing installation turn off and isolate the electrical supply
 - Risk of accidental contact with live parts. Do not energise with product open or disassembled.
 - The only replaceable part is the battery
 - Do not attempt to service other parts of the fitting as this will void the warranty.
 - After installation allow the battery to charge for 24 hours before carrying out discharge testing.
 - WARNING: ALL MAINTENANCE, SUCH AS BATTERY CHANGE ON THIS LUMINAIRE, TO BE PERFORMED BY QUALIFIED PERSONNEL ONLY. DE-ENERGISE ALL SUPPLIES BEFORE MAINTENANCE.
 - As the installer, it is your responsibility to ensure you comply to all relevant building and safety codes. for example the BCA, AS3000
 - The replacement of the battery is needed when they no longer meet their rated duration of operation after the corresponding recharge period.
 - Dongguan Evolt Electronics Co., Ltd. No.3 Qinghu East Road Yuliangwei Village, Qingxi TownDongguan City, Guangdong, China 523649

Product Line Drawing

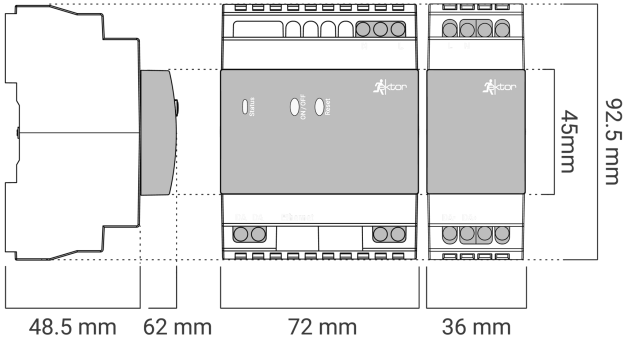

Product Install Picture

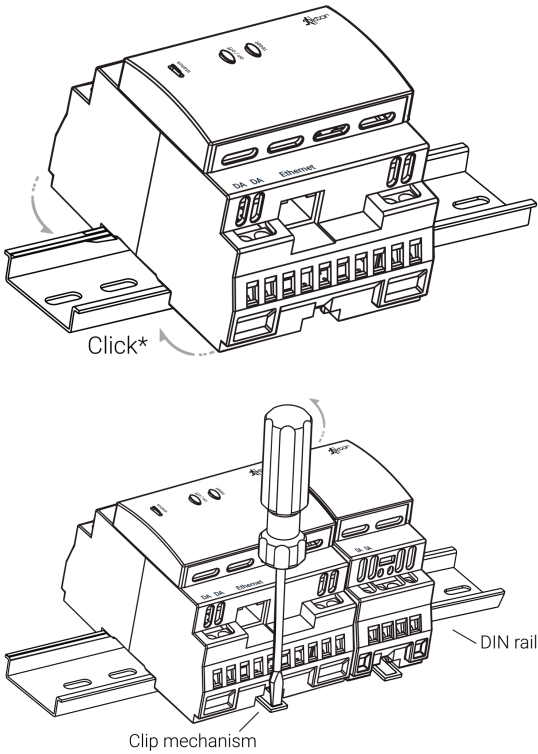

Wiring Diagram

