




Product Line Drawing

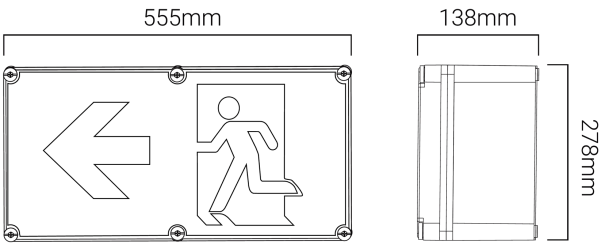

Input Parameters	
Input Voltage Range	220-240 Vac
Input Current	<0.06A
Power Factor	> 0.32
Frequency	50Hz
Ambient Temperature	0-40C
Class	I
Maximum Input Power (While Charging Battery)	5.0 W
Average Input Power (Not Charging Battery)	3.5 W

DALI Parameters	
Input Current	2 mA
Over Voltage Protection	Yes
Input Voltage	9.5 - 22.5 Vdc

Emergency Parameters	
Emergency Duration	180minutes
Battery Code(s)	zc-batt-2B1-AAA
Battery Type	LiFePO4
Input Battery Voltage	4.0-8.0 Vdc
Output Battery Voltage	4.0-7.3 Vdc
Input Battery Current	510mA
Output Battery Current	150mA
Charging Time	24 hours
Emergency Output Power	2.4 W
Exit Sign View Distance	40m

Mechanical	
Material	Polycarbonate
Product Colour	RAL7035
Wiring Type	Terminal block (0.5-16.0mm²)
Mounting	Wall Mounting
IK Rating	IK08
Ingress Protection	IP65
Product Dimension Length	555mm
Product Dimension Height	138mm
Product Dimension Width	278mm

Standards	
IEC 60598-1	Yes
IEC 60598-2-22	Yes
IEC 62034	Yes

Photometrics

Packaging	
Carton Length	575mm
Carton Width	295mm
Carton Height	155mm
Unit Net Weight	3.34kg
Carton Gross Weight	4.13kg
EAN 13	6971103538858
EAN 14	16971103538855
Carton Quantity	Carton 1