




Input Parameters	
Input Voltage Range	220-240 Vac
Input Current	<0.03A
Power Factor	> 0.32
Frequency	50Hz
Ambient Temperature	0-40C
Class	II
Maximum Input Power (While Charging Battery)	2.6W
Average Input Power (Not Charging Battery)	2.0W


DALI Parameters	
Input Current	2 mA
Over Voltage Protection	Yes
Input Voltage	9.5 - 22.5 Vdc

Emergency Parameters	
Emergency Duration	180minutes
Battery Code(s)	zc-batt-1A1-ACA
Battery Type	LiFePO4
Input Battery Voltage	2.5-4.0 Vdc
Output Battery Voltage	2.5-3.65 Vdc
Input Battery Current	330mA
Output Battery Current	80mA
Charging Time	24 hours
Emergency Output Power	0.6 W
Exit Sign View Distance	30m

Product Line Drawing

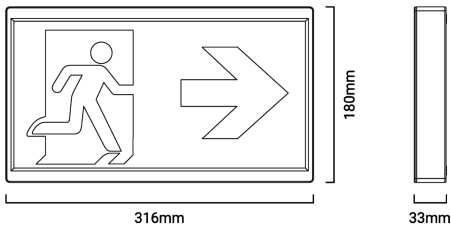


Product Install Picture

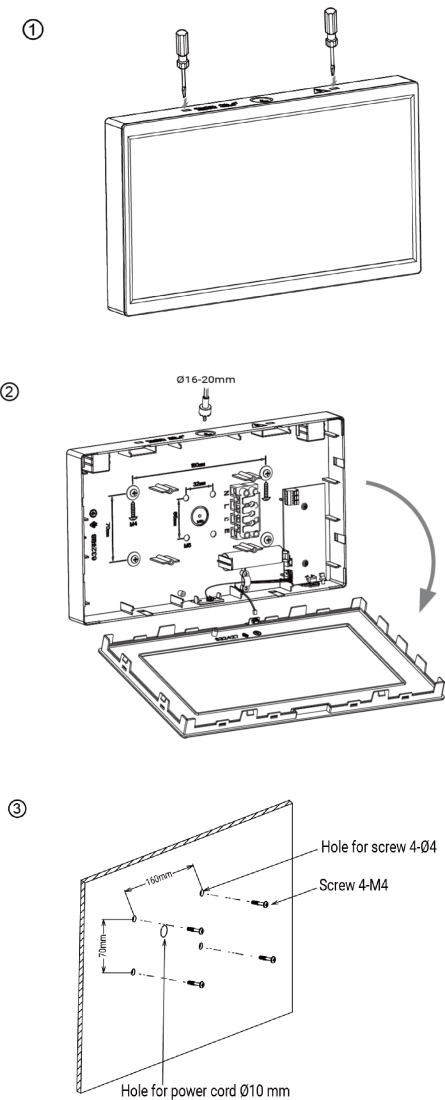

Wiring Diagram

Mechanical	
Material	Polycarbonate
Product Colour	RAL9011
Wiring Type	Push Terminal (0.5-2.5mm2)
Mounting	Wall Mount
IK Rating	IK04
Ingress Protection	IP20
Product Dimension Length	316mm
Product Dimension Height	180mm
Product Dimension Width	33mm





Standards	
IEC 60598-1	Yes
IEC 60598-2-22	Yes
IEC 62034	Yes

Photometrics