




Product Line Drawing

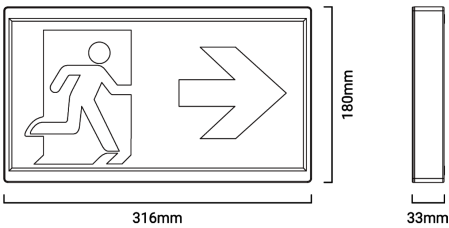

Input Parameters	
Input Voltage Range	220-240 Vac
Input Current	<0.03A
Power Factor	> 0.32
Frequency	50Hz
Ambient Temperature	0-40C
Class	II
Maximum Input Power (While Charging Battery)	2.8 W
Average Input Power (Not Charging Battery)	2.0W

DALI Parameters	
Input Current	2 mA
Over Voltage Protection	Yes
Input Voltage	9.5 - 22.5 Vdc

Emergency Parameters	
Emergency Duration	180minutes
Battery Code(s)	zc-batt-1A1-ACA
Battery Type	LiFePO4
Input Battery Voltage	2.0-4.0 Vdc
Output Battery Voltage	2.0-3.65 Vdc
Input Battery Current	330mA
Output Battery Current	80mA
Charging Time	24 hours
Emergency Output Power	0.65 W
Exit Sign View Distance	30m

Mechanical	
Material	Polycarbonate
Product Colour	RAL9003
Wiring Type	Push Terminal (0.5-2.5mm2)
Mounting	Wall Mount
IK Rating	IK04
Ingress Protection	IP20
Product Dimension Length	316mm
Product Dimension Height	180mm
Product Dimension Width	33mm

Standards	
IEC 60598-1	Yes
IEC 60598-2-22	Yes
IEC 62034	Yes

Packaging	
Carton Length	410mm
Carton Width	350mm
Carton Height	205mm
Unit Net Weight	0.60kg
Carton Gross Weight	8.33kg
EAN 13	6971103534119
EAN 14	16971103534116
Carton Quantity	Carton 10

Photometrics