



Product Features

- Efficient energy consumption
- Adjust vertically (Up/Down) and horizontally (Left/Right)


Input Parameters

Input Voltage Range	220-240 Vac
Input Current	<0.01A
Power Factor	> 0.32
Frequency	50Hz
Ambient Temperature	40C
Ambient Temperature	0-40C
Class	II
Maximum Input Power (While Charging Battery)	2.5W
Average Input Power (Not Charging Battery)	0.6W

Emergency Parameters

Emergency Duration	180minutes
Battery Code(s)	zc-batt-1B1-ACA
Battery Type	LiFePO4
Input Battery Voltage	2.0-4.0 Vdc
Output Battery Voltage	2.0-3.65 Vdc
Input Battery Current	250mA
Output Battery Current	0.15A
Charging Time	24 hours
Emergency Output Power	1.6 W

Product Line Drawing

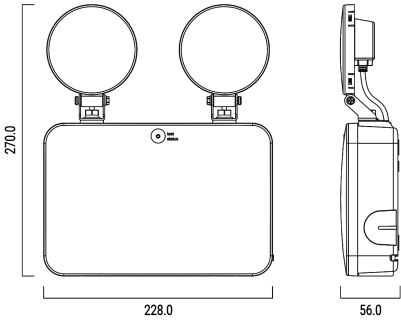



Mechanical

Material	Polycarbonate
Product Colour	RAL9011
Wiring Type	Push Terminal Block (0.5-2.5mm2)
Mounting	Wall Mount
Ingress Protection	IP65
Product Dimension Length	228mm
Product Dimension Height	270mm
Product Dimension Width	56mm

Standards

IEC 60598-1	Yes
IEC 60598-2-22	Yes
IEC 62034	Yes


Packaging

Carton Length	515mm
Carton Width	295mm
Carton Height	295mm
Unit Net Weight	0.00kg
Carton Gross Weight	0.00..
EAN 13	6971103536007
EAN 14	
Carton Quantity	Carton 5

Photometrics

Emergency Mode (AU)

Emergency Mode (AU)

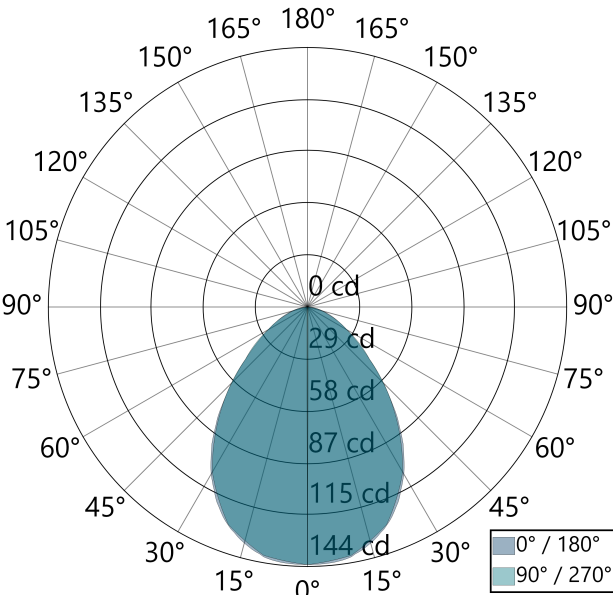

Lumens	269.1
--------	-------