




Product Features

- Efficient energy consumption
- Adjust vertically (Up/Down) and horizontally (Left/Right)

Input Parameters

Input Voltage Range	220-240 Vac
Input Current	<0.03A
Power Factor	> 0.32
Frequency	50Hz
Ambient Temperature	0-40C
Class	II
Maximum Input Power (While Charging Battery)	2.0 W
Average Input Power (Not Charging Battery)	0.6W

Product Line Drawing

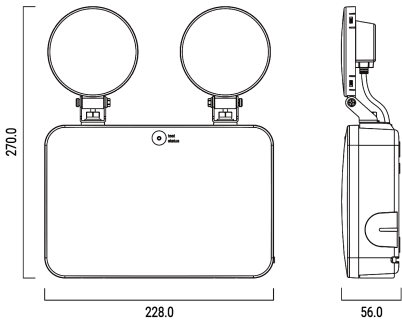

DALI Parameters

Input Current	2 mA
Over Voltage Protection	Yes
Input Voltage	9.5 - 22.5 Vdc

Emergency Parameters

Emergency Duration	180minutes
Battery Code(s)	zc-batt-1B1-ACA
Battery Type	LiFePO4
Input Battery Voltage	2.0-4.0 Vdc
Output Battery Voltage	2.0-3.65 Vdc
Input Battery Current	560mA
Output Battery Current	0.15A
Charging Time	24 hours
Emergency Output Power	1.5 W

Mechanical

Material	Polycarbonate
Product Colour	RAL9003
Wiring Type	Push Terminal Block (0.5-2.5mm2)
Mounting	Wall Mount
Ingress Protection	IP65
Product Dimension Length	228mm
Product Dimension Height	270mm
Product Dimension Width	56mm

Standards

IEC 60598-1	Yes
IEC 60598-2-22	Yes
IEC 62034	Yes


Packaging

Carton Length	330mm
Carton Width	265mm
Carton Height	296mm
Unit Net Weight	0.71kg
Carton Gross Weight	4.85kg
EAN 13	6971103536014
EAN 14	16971103536011
Carton Quantity	Carton 5

Photometrics

Emergency Mode (AU)

Emergency Mode (AU)

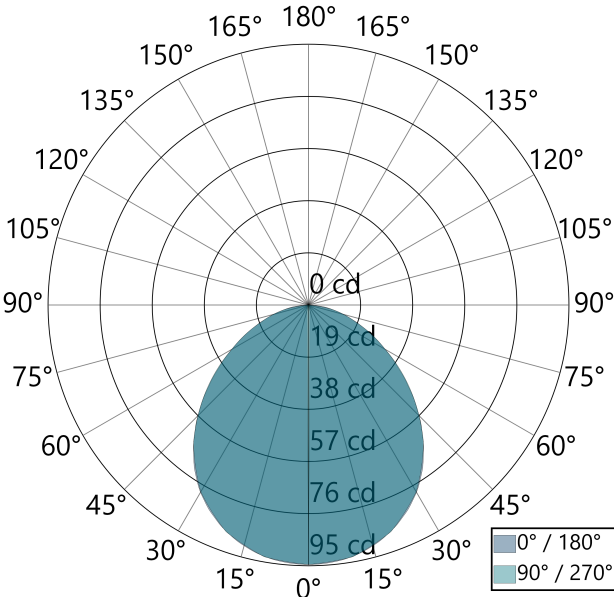

Lumens	239.6
--------	-------

Emergency Mode (AU) 0.5 lux



Mounting Height	0.5 lux	
2.5m	4.42	8.84
2.8m	4.66	9.32
3.0m	4.80	9.60
4.0m	5.41	10.81
5.0m	5.75	11.50

Emergency Mode (AU) 1 lux



Mounting Height	1 lux	
2.5m	3.64	7.28
2.8m	3.78	7.57
3.0m	3.84	7.68
4.0m	4.22	8.43
5.0m	4.35	8.69