




Input Parameters	
Input Voltage Range	220-240 Vac
Input Current	<0.03A
Power Factor	> 0.32
Frequency	50Hz
Ambient Temperature	0-40C
Class	II
Maximum Input Power (While Charging Battery)	2.5 W
Average Input Power (Not Charging Battery)	2.0W

DALI Parameters	
Input Current	2 mA
Over Voltage Protection	Yes
Input Voltage	9.5 - 22.5 Vdc

Emergency Parameters	
Emergency Duration	180minutes
Battery Code(s)	zc-batt-1A1-ACA
Battery Type	LiFePO4
Input Battery Voltage	2.0-4.0 Vdc
Output Battery Voltage	2.0-4.0 Vdc
Input Battery Current	330mA
Output Battery Current	80mA
Charging Time	24 hours
Emergency Output Power	0.65 W
Exit Sign View Distance	30m

Mechanical	
Material	Polycarbonate
Product Colour	RAL9003
Wiring Type	Terminal block
Mounting	Surface Mount/ Wall Mount
Ingress Protection	IP20
Product Dimension Length	326mm
Product Dimension Height	211mm
Product Dimension Width	80mm

Product Line Drawing

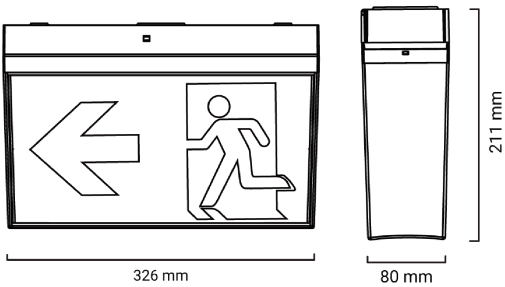

Standards	
IEC 60598-1	Yes
IEC 60598-2-22	Yes

Packaging	
Carton Length	700mm
Carton Width	343mm
Carton Height	230mm
Unit Net Weight	0.84kg
Carton Gross Weight	8.99kg
EAN 13	6971103537783
EAN 14	16971103537780
Carton Quantity	Carton 8

Photometrics