




Product Line Drawing

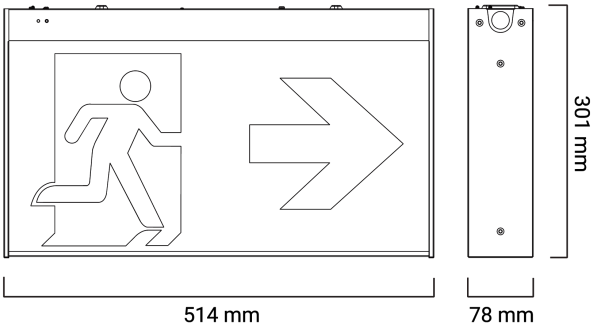

Product Features

- Large terminal blocks
- Single and double-sided decals
- Maintained operation
- Soft-start charger to reduce building load
- Fast emergency switch-over (<0.5s) for high-task areas
- Wall, ceiling and rod mounting (with Rod Mount Kit)
- High Quality Lithium battery (LiFePO4) and smart charger
- Standalone (SPU)

Input Parameters

Input Voltage Range	220-240 Vac
Input Current	<0.03A
Power Factor	> 0.32
Frequency	50/60Hz
Ambient Temperature	0-40C
Class	I
Maximum Input Power (While Charging Battery)	3.5 W
Average Input Power (Not Charging Battery)	2.5 W

DALI Parameters

Over Voltage Protection	Yes
Input Voltage	9.5 - 22.5 Vdc

Emergency Parameters

Emergency Duration	180minutes
Battery Code(s)	zc-batt-2A1-AAA
Battery Type	LiFePO4
Input Battery Voltage	5.0-7.5 Vdc
Output Battery Voltage	4.0-8.0 Vdc
Input Battery Current	160mA
Output Battery Current	150mA
Charging Time	24 hours
Emergency Output Power	0.7 W
Exit Sign View Distance	50m

Mechanical	
Material	SECC
Product Colour	RAL9003
Wiring Type	Terminal block
Mounting	Surface Mount
Ingress Protection	IP20
Product Dimension Length	514mm
Product Dimension Height	301mm
Product Dimension Width	78mm

Standards	
IEC 60598-1	Yes
IEC 60598-2-22	Yes
IEC 62034	Yes

Packaging	
Carton Length	0..
Carton Width	0..
Carton Height	0..
Unit Net Weight	0.00kg
Carton Gross Weight	0.00..
EAN 13	
EAN 14	
Carton Quantity	Carton 5