




Product Line Drawing

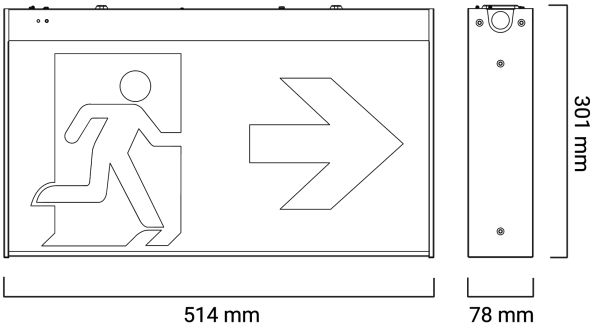

Input Parameters	
Input Voltage Range	220-240 Vac
Input Current	<0.03A
Power Factor	> 0.32
Frequency	50/60Hz
Ambient Temperature	0-40C
Class	I
Maximum Input Power (While Charging Battery)	3.5 W
Average Input Power (Not Charging Battery)	2.5 W

DALI Parameters	
Input Current	2 mA
Over Voltage Protection	Yes
Input Voltage	9.5 - 22.5 Vdc

Emergency Parameters	
Emergency Duration	180minutes
Battery Code(s)	zc-batt-2A1-AAA
Battery Type	LiFePO4
Input Battery Voltage	4.0-8.0 Vdc
Output Battery Voltage	4.0-8.0 Vdc
Input Battery Current	160mA
Output Battery Current	150mA
Charging Time	24 hours
Emergency Output Power	0.7 W
Exit Sign View Distance	50m

Mechanical	
Material	SECC
Product Colour	RAL9003
Wiring Type	Terminal block
Mounting	Surface Mount
Ingress Protection	IP20
Product Dimension Length	514mm
Product Dimension Height	301mm
Product Dimension Width	78mm

Standards	
IEC 60598-1	Yes
IEC 60598-2-22	Yes
IEC 62034	Yes

Packaging	
Carton Length	565mm
Carton Width	518mm
Carton Height	343mm
Unit Net Weight	2.04kg
Carton Gross Weight	14.89kg
EAN 13	6971103538827
EAN 14	16971103538824
Carton Quantity	Carton 5

Photometrics