



Product Features

- Single and double sided decals
- IP65 Weatherproof Case available but not included
- Wall, ceiling, chain and rod mounting (with Rod Mount Kit)
- Long life electronics
- High Quality Lithium battery (LiFePO4) and smart charger
- Standalone (SPU)


Input Parameters

Input Voltage Range	220-240 Vac
Input Current	<0.03A
Power Factor	> 0.32
Frequency	50Hz
Ambient Temperature	0-40C
Class	II
Maximum Input Power (While Charging Battery)	2.5W
Average Input Power (Not Charging Battery)	2.0W

Emergency Parameters

Emergency Duration	180minutes
Battery Code(s)	zc-batt-1A1-ACA
Battery Type	LiFePO4
Input Battery Voltage	2.0-4.0 Vdc
Output Battery Voltage	2.0-4.0 Vdc
Input Battery Current	330mA
Output Battery Current	0.08A
Charging Time	24 hours
Emergency Output Power	0.65 W
Exit Sign View Distance	30m

Product Line Drawing

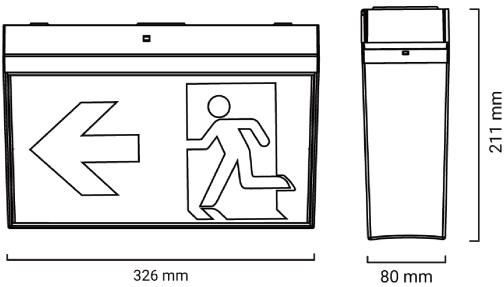

Mechanical

Material	Polycarbonate
Product Colour	RAL9003
Wiring Type	Hard wired (16mm2)
Mounting	Surface Mount/ Wall mount
Ingress Protection	IP20
Product Dimension Length	326mm
Product Dimension Height	211mm
Product Dimension Width	80mm

Standards

IEC 60598-1	Yes
IEC 60598-2-22	Yes
IEC 62034	Yes

Packaging

Carton Length	700mm
Carton Width	355mm
Carton Height	235mm
Unit Net Weight	0.80kg
Carton Gross Weight	9.18kg
EAN 13	6971103537769
EAN 14	16971103537766
Carton Quantity	Carton 8

Photometrics