




Input Parameters	
Input Voltage Range	220-240 Vac
Input Current	<0.03A
Power Factor	> 0.32
Frequency	50Hz
Ambient Temperature	0-40C
Class	II
Maximum Input Power (While Charging Battery)	2.5W
Average Input Power (Not Charging Battery)	2.0W

Emergency Parameters	
Emergency Duration	180minutes
Battery Code(s)	zc-batt-1A1-ACA
Battery Type	LiFePO4
Input Battery Voltage	2.0-4.0 Vdc
Output Battery Voltage	2.0-4.0 Vdc
Input Battery Current	330mA
Output Battery Current	0.08A
Charging Time	24 hours
Emergency Output Power	0.65 W
Exit Sign View Distance	30m


Mechanical	
Material	Polycarbonate
Product Colour	RAL9003
Wiring Type	Hard wired (16mm2)
Mounting	Surface Mount/ Wall mount
Ingress Protection	IP20
Product Dimension Length	326mm
Product Dimension Height	211mm
Product Dimension Width	80mm

Standards	
IEC 60598-1	Yes
IEC 60598-2-22	Yes
IEC 62034	Yes

Product Line Drawing

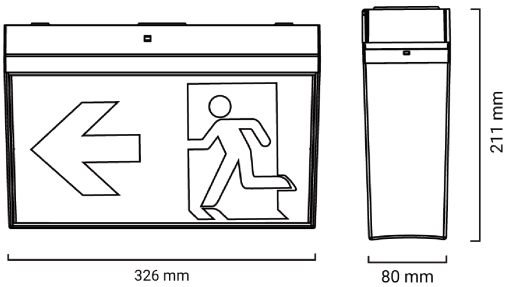


Product Install Picture

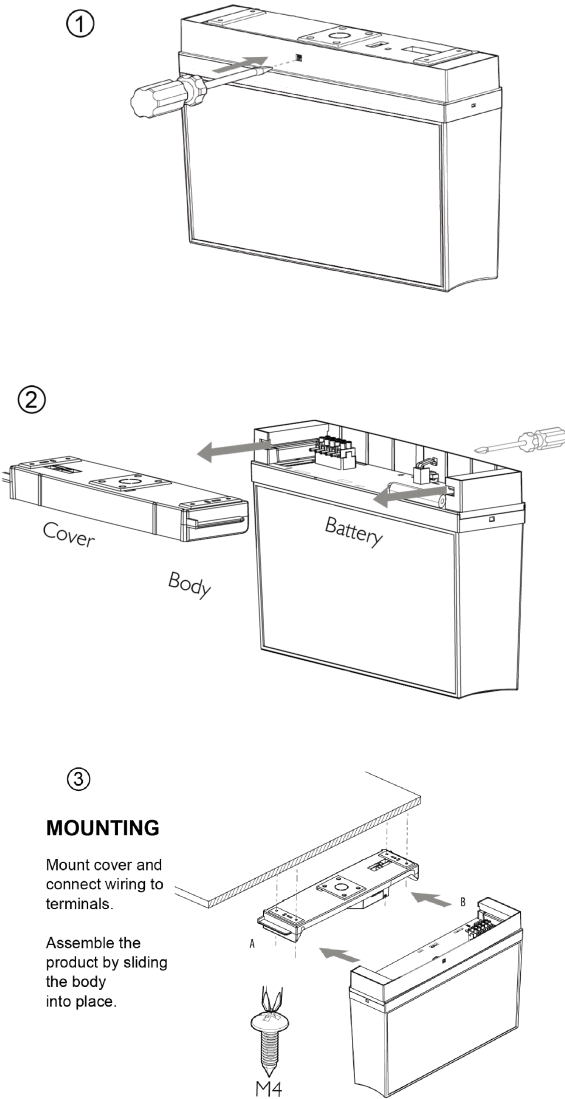


Required Safety Warnings

- This product must only be installed by a licensed electrician.
- Before commencing installation turn off and isolate the electrical supply
- Risk of accidental contact with live parts. Do not energise with product open or disassembled.
- After installation allow the battery to charge for 24 hours before carrying out discharge testing.
- WARNING: ALL MAINTENANCE, SUCH AS BATTERY CHANGE ON THIS LUMINAIRE, TO BE PERFORMED BY QUALIFIED PERSONNEL ONLY. DE-ENERGISE ALL SUPPLIES BEFORE MAINTENANCE.
- As the installer, it is your responsibility to ensure you comply to all relevant building and safety codes. for example the BCA, AS3000
- The light source contained in this luminaire shall only be replaced by the manufacturer or their service agent or a similar qualified person.
- The replacement of the battery is needed when they no longer meet their rated duration of operation after the corresponding recharge period.
- For indoor use only
- Dongguan Evolt Electronics Co., Ltd. No.3 Qinghu East Road Yuliangwei Village, Qingxi TownDongguan City, Guangdong, China 523649

④

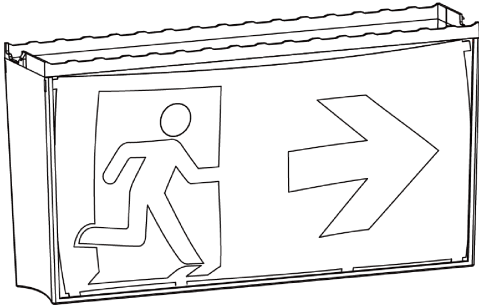

Wiring Diagram



Strip length reference: 8-10mm
Wire range: 0.5-6.0mm² □

