




Product Line Drawing

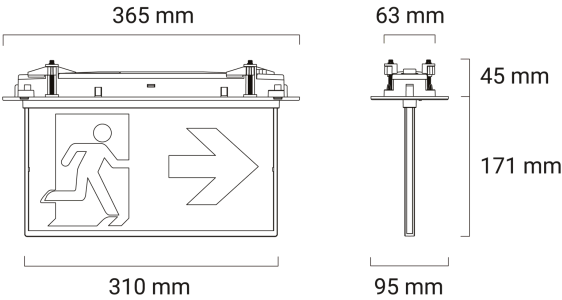

Input Parameters	
Input Voltage Range	220-240 Vac
Input Current	<0.03A
Power Factor	> 0.32
Frequency	50Hz
Ambient Temperature	40C
Ambient Temperature	0-40C
Class	II
Maximum Input Power (While Charging Battery)	2.3 W
Average Input Power (Not Charging Battery)	1.8 W

DALI Parameters	
Input Current	2 mA
Over Voltage Protection	Yes
Input Voltage	9.5 - 22.5 Vdc

Emergency Parameters	
Emergency Duration	180minutes
Battery Code(s)	zc-batt-1A1-ACA
Battery Type	LiFePO4
Input Battery Voltage	2.0-4.0 Vdc
Output Battery Voltage	2.0-3.65 Vdc
Input Battery Current	200mA
Output Battery Current	80mA
Charging Time	24 hours
Emergency Output Power	0.4 W
Exit Sign View Distance	30m

Mechanical	
Material	Polycarbonate
Product Colour	RAL9003
Wiring Type	4 Core Free end
Mounting	Recessed Mount
Ingress Protection	IP20
Product Dimension Length	365mm
Product Dimension Height	217mm
Product Dimension Width	95mm
Product Cutout Dimension LxW	63x335mm

Standards	
IEC 60598-1	Yes
IEC 60598-2-22	Yes
IEC 62034	Yes

Packaging	
Carton Length	0..
Carton Width	0..
Carton Height	0..
Unit Net Weight	0.00kg
Carton Gross Weight	0.00..
EAN 13	
EAN 14	
Carton Quantity	Carton 4