




Product Line Drawing

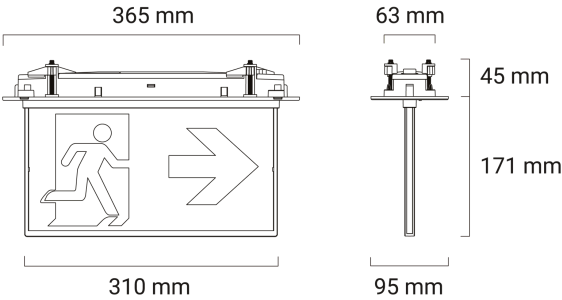

| Input Parameters                             |             |
|----------------------------------------------|-------------|
| Input Voltage Range                          | 220-240 Vac |
| Input Current                                | <0.03A      |
| Power Factor                                 | > 0.32      |
| Frequency                                    | 50Hz        |
| Ambient Temperature                          | 40C         |
| Ambient Temperature                          | 0-40C       |
| Class                                        | II          |
| Maximum Input Power (While Charging Battery) | 2.3 W       |
| Average Input Power (Not Charging Battery)   | 1.8 W       |

| DALI Parameters         |                |
|-------------------------|----------------|
| Input Current           | 2 mA           |
| Over Voltage Protection | Yes            |
| Input Voltage           | 9.5 - 22.5 Vdc |

| Emergency Parameters    |                 |
|-------------------------|-----------------|
| Emergency Duration      | 180minutes      |
| Battery Code(s)         | zc-batt-1A1-ACA |
| Battery Type            | LiFePO4         |
| Input Battery Voltage   | 2.0-4.0 Vdc     |
| Output Battery Voltage  | 2.0-3.65 Vdc    |
| Input Battery Current   | 200mA           |
| Output Battery Current  | 80mA            |
| Charging Time           | 24 hours        |
| Emergency Output Power  | 0.4 W           |
| Exit Sign View Distance | 30m             |

| Mechanical                   |                 |
|------------------------------|-----------------|
| Material                     | Polycarbonate   |
| Product Colour               | RAL9003         |
| Wiring Type                  | 4 Core Free end |
| Mounting                     | Recessed Mount  |
| Ingress Protection           | IP20            |
| Product Dimension Length     | 365mm           |
| Product Dimension Height     | 217mm           |
| Product Dimension Width      | 95mm            |
| Product Cutout Dimension LxW | 63x335mm        |

| Standards      |     |
|----------------|-----|
| IEC 60598-1    | Yes |
| IEC 60598-2-22 | Yes |
| IEC 62034      | Yes |

| Packaging           |                |
|---------------------|----------------|
| Carton Length       | 420mm          |
| Carton Width        | 345mm          |
| Carton Height       | 195mm          |
| Unit Net Weight     | 0.93kg         |
| Carton Gross Weight | 5.50kg         |
| EAN 13              | 6971103536199  |
| EAN 14              | 16971103536196 |
| Carton Quantity     | Carton 4       |

Photometrics