




Product Line Drawing

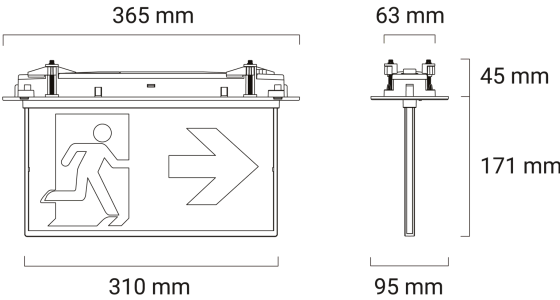

Input Parameters	
Input Voltage Range	220-240 Vac
Input Current	<0.03A
Power Factor	> 0.32
Frequency	50Hz
Ambient Temperature	40C
Ambient Temperature	0-40C
Class	II
Maximum Input Power (While Charging Battery)	2.8W
Average Input Power (Not Charging Battery)	2.3W

Emergency Parameters	
Emergency Duration	180minutes
Battery Code(s)	zc-batt-1A1-ACA
Battery Type	LiFePO4
Input Battery Voltage	2.0-4.0 Vdc
Output Battery Voltage	2.0-3.65 Vdc
Input Battery Current	180mA
Output Battery Current	0.08A
Charging Time	24 hours
Emergency Output Power	0.6 W
Exit Sign View Distance	30m

Mechanical	
Material	Polycarbonate
Product Colour	RAL9003
Wiring Type	4 Core Free end
Mounting	Recessed Mount
Ingress Protection	IP20
Product Dimension Length	365mm
Product Dimension Height	217mm
Product Dimension Width	95mm
Product Cutout Dimension LxW	63x335mm

Standards	
IEC 60598-1	Yes
IEC 60598-2-22	Yes
IEC 62034	Yes

Packaging	
Carton Length	420mm
Carton Width	345mm
Carton Height	195mm
Unit Net Weight	0.92kg
Carton Gross Weight	5.45kg
EAN 13	6971103536212
EAN 14	16971103536219
Carton Quantity	Carton 4

Photometrics