




Product Line Drawing

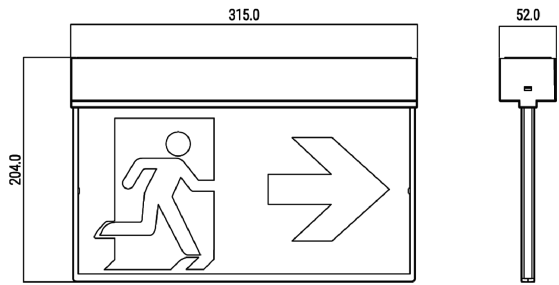

Product Features

- Single and double-sided decals
- Chain and rod mounting with Surface and Rod Mount Kit

Input Parameters

Input Voltage Range	220-240 Vac
Input Current	<0.03A
Power Factor	> 0.32
Frequency	50Hz
Ambient Temperature	40C
Ambient Temperature	0-40C
Class	II
Maximum Input Power (While Charging Battery)	2.6W
Average Input Power (Not Charging Battery)	2.3W

DALI Parameters

Input Current	2 mA
Over Voltage Protection	Yes
Input Voltage	9.5 - 22.5 Vdc

Emergency Parameters

Emergency Duration	180minutes
Battery Code(s)	zc-batt-1A1-ACA
Battery Type	LiFePO4
Input Battery Voltage	2.0-4.0 Vdc
Output Battery Voltage	2.0-3.65 Vdc
Input Battery Current	300mA
Output Battery Current	0.08A
Charging Time	24 hours
Emergency Output Power	1.0 W
Exit Sign View Distance	30m

Mechanical

Material	Polycarbonate
Product Colour	RAL9011
Wiring Type	Push Terminal (0.5-2.5mm2)
Mounting	Surface mount/Jack chain mount/Wall mount
Ingress Protection	IP20
Product Dimension Length	315mm
Product Dimension Height	204mm
Product Dimension Width	52mm

Standards

IEC 60598-1	Yes
IEC 60598-2-22	Yes
IEC 62034	Yes

Packaging

Carton Length	355mm
Carton Width	250mm
Carton Height	240mm
Unit Net Weight	0.77kg
Carton Gross Weight	4.36kg
EAN 13	6971103536267
EAN 14	16971103536264
Carton Quantity	Carton 4

Photometrics