




Product Line Drawing

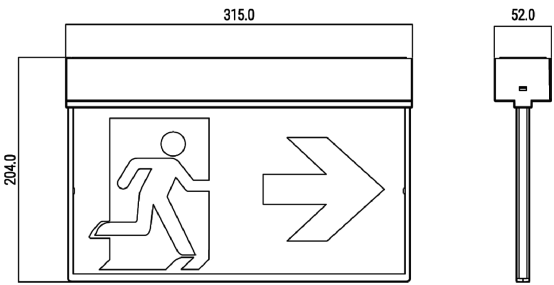

Product Features

- Single and double-sided decals
- Chain and rod mounting with Surface and Rod Mount Kit

Input Parameters

Input Voltage Range	220-240 Vac
Input Current	<0.03A
Power Factor	> 0.32
Frequency	50Hz
Ambient Temperature	40C
Ambient Temperature	0-40C
Class	II
Maximum Input Power (While Charging Battery)	2.6W
Average Input Power (Not Charging Battery)	2.3w

Emergency Parameters

Emergency Duration	180minutes
Battery Code(s)	zc-batt-1A1-ACA
Battery Type	LiFePO4
Input Battery Voltage	2.0-4.0 Vdc
Output Battery Voltage	2.0-3.65 Vdc
Input Battery Current	300mA
Output Battery Current	0.08A
Charging Time	24 hours
Emergency Output Power	1.0 W
Exit Sign View Distance	30m

Mechanical

Material	Polycarbonate
Product Colour	RAL9011
Wiring Type	Push Terminal (0.5-2.5mm2)
Mounting	Surface mount/Jack chain mount/Wall mount
Ingress Protection	IP20
Product Dimension Length	315mm
Product Dimension Height	204mm
Product Dimension Width	52mm

Standards	
IEC 60598-1	Yes
IEC 60598-2-22	Yes
IEC 62034	Yes

Packaging	
Carton Length	0..
Carton Width	0..
Carton Height	0..
Unit Net Weight	0.00kg
Carton Gross Weight	0.00..
EAN 13	6971103536243
EAN 14	
Carton Quantity	Carton 4

Photometrics