



Product Features

- Replaceable easy fit, quick-release decals


Input Parameters

Input Voltage Range	220-240 Vac
Input Current	<0.03A
Power Factor	> 0.32
Frequency	50Hz
Ambient Temperature	0-40C
Class	II
Maximum Input Power (While Charging Battery)	2.5 W
Average Input Power (Not Charging Battery)	2.0 W

Emergency Parameters

Emergency Duration	180minutes
Battery Code(s)	zc-batt-1A1-ACA
Battery Type	LiFePO4
Input Battery Voltage	2.0-4.0 Vdc
Output Battery Voltage	2.0-3.65 Vdc
Input Battery Current	300mA
Output Battery Current	80mA
Charging Time	24 hours
Emergency Output Power	0.68 W
Exit Sign View Distance	30m

Product Line Drawing

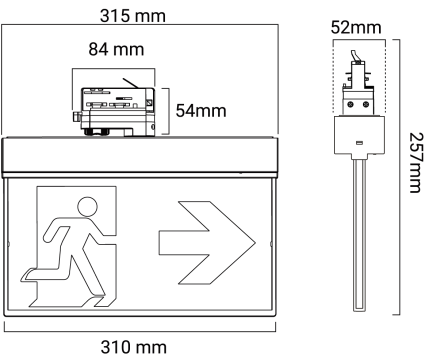

Mechanical

Material	Polycarbonate
Product Colour	RAL9003
Wiring Type	Terminal block
Mounting	Powergear track adapter
Ingress Protection	IP20
Product Dimension Length	315mm
Product Dimension Height	271mm
Product Dimension Width	52mm

Standards

IEC 60598-1	Yes
IEC 60598-2-22	Yes
IEC 62034	Yes

Packaging

Carton Length	0..
Carton Width	0..
Carton Height	0..
Unit Net Weight	0.00kg
Carton Gross Weight	0.00..
EAN 13	6971103538865
EAN 14	16971103538862
Carton Quantity	Carton 4

Photometrics

Emergency Mode (AU)

Emergency Mode (AU) 0.5 lux



Mounting Height	0.5 lux			
2.5m	1.65	3.31	2.83	1.41
2.8m	1.31	2.61	2.49	1.25
3.0m	1.00	2.01	2.18	1.09

Emergency Mode (AU) 1 lux



Mounting Height	1 lux			
-----------------	-------	--	--	--