



Product Features

- Non-maintained operation
- Weatherproof IP65 rating
- High quality LiFePO4 battery
- DALI (IEC62386)

Input Parameters

Input Voltage Range	220-240 Vac
Input Current	<0.04A
Power Factor	> 0.32
Frequency	50Hz
Ambient Temperature	40C
Ambient Temperature	0-40C
Class	I
Maximum Input Power (While Charging Battery)	<3.5W
Average Input Power (Not Charging Battery)	<2.0W


DALI Parameters

Input Current	2 mA
Over Voltage Protection	Yes
Input Voltage	9.5 - 22.5 Vdc

Emergency Parameters

Emergency Duration	180minutes
Battery Code(s)	zc-batt-2B1-AAA
Battery Type	LiFePO4
Input Battery Voltage	4.0-8.0 Vdc
Output Battery Voltage	4.0-7.3 Vdc
Input Battery Current	650mA
Output Battery Current	150mA
Charging Time	24 hours
Emergency Output Power	3.45 W

Product Line Drawing

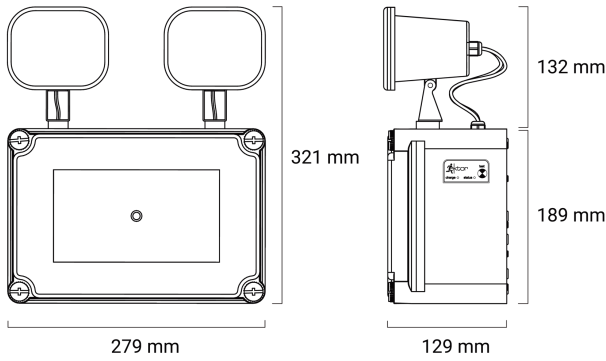



Mechanical

Material	Polycarbonate
Product Colour	RAL9003
Wiring Type	Terminal Block
Mounting	Wall Mount
IK Rating	IK10
Ingress Protection	IP65
Product Dimension Length	279mm
Product Dimension Height	321mm
Product Dimension Width	129mm

Standards

IEC 60598-1	Yes
IEC 60598-2-22	Yes


Packaging

Carton Length	588mm
Carton Width	295mm
Carton Height	345mm
Unit Net Weight	2.50kg
Carton Gross Weight	11.60kg
EAN 13	6971103537844
EAN 14	16971103537841
Carton Quantity	Carton 4

Photometrics

Emergency Mode (AU)

Emergency Mode (AU)

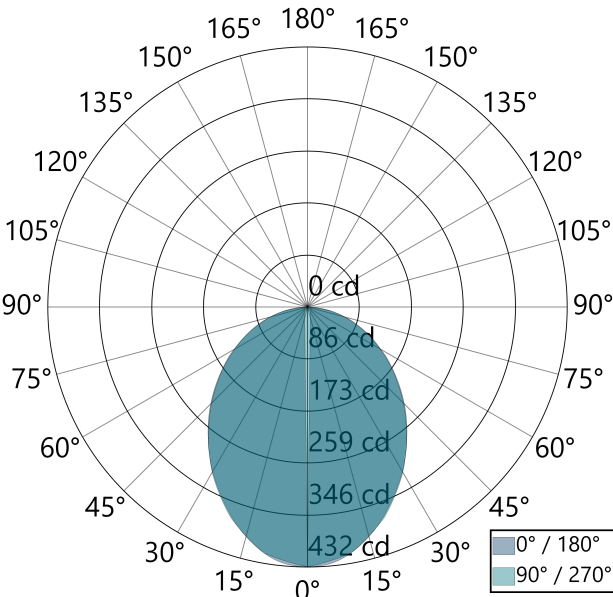

Lumens	1029
--------	------