




Product Line Drawing

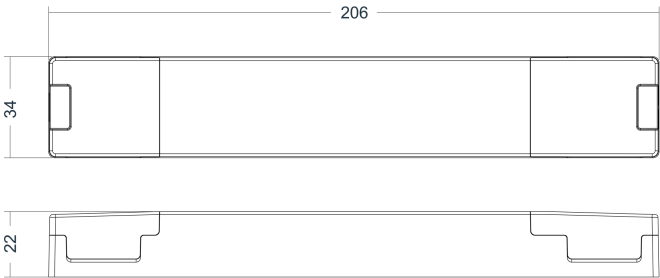

Product Features

- 6 years design life
- Non-maintained operation
- Premium Lithium batteries (LiFePO4)
- Includes automatic and manual test facility
- Rated duration of 1hr, 2hrs and 3hrs (special order)
- Low profile form factor for luminaire installation
- Suitable for LED arrays of 10 – 50V, 50 – 100V, or 100 – 250V
- Compliant to Australian and international safety and performance standards
- Adjustable constant power emergency output

Input Parameters

Input Voltage Range	220-240 Vac
Input Current	<0.02A
Power Factor	> 0.70
Frequency	50Hz
Ambient Temperature	-5-50C
Class	II
Maximum Input Power (While Charging Battery)	2.5 W
Average Input Power (Not Charging Battery)	0.5 W

Output Parameters

Output Voltage 1	100 - 250 Vdc
Output Current 1	50 - 10 mA
Output Mode 1	Constant Power

Emergency Parameters

Emergency Duration	180minutes
Battery Type	LiFePO4
Input Battery Voltage	2.0-4.0 Vdc
Output Battery Voltage	2.0-3.65 Vdc
Input Battery Current	2000mA
Output Battery Current	200mA
Charging Time	24 hours
Emergency Output Power	4.0 W

Mechanical	
Material	Polycarbonate
Product Colour	RAL9003
Wiring Type	Push Terminal block
Mounting	Inbuilt
IK Rating	IK02
Ingress Protection	IP20
Product Dimension Length	178mm
Product Dimension Height	21mm
Product Dimension Width	30mm

Packaging	
Carton Length	0..
Carton Width	0..
Carton Height	0..
Unit Net Weight	0.00kg
Carton Gross Weight	0.00..
EAN 13	6971103530845
EAN 14	16971103530842
Carton Quantity	Carton 50